HM4-Magnetic holders

HM4-Magnetic holders are designed for fastening internal thread anchors to steel formworks. Neodymium magnets are used as a material to hold fast even on a small surface area.

Special heights or diameters of the body, as well as the body with replaceable screw elements can be implemented on request.

SALON TUKITUOTE

Salon Tukituote Oy | Kaskiahonkatu 8, FI-24280 SALO, FINLAND
Tel. +358 (0)2 731 2415, Fax +358 (0)2 733 3922, tukituote@tukituote.fi

www.tukituote.fi

Magnetic holder HM4-100

100% holding force and 12 mm immersion

Product no	Thread pin M / Rd	Adhesion force kg	D 1 mm	D 2 mm	Recess h mm
HM4-6 M8-1	M 8	100	65	60	12
HM4-6 M10-1	M 10				
HM4-6 M12-1	M 12				
HM4-6 M14-1	M 14				
HM4-6 M16-1	M 16				
HM4-6 M18-1	M 18				
HM4-6 M20-1	M 20				
HM4-6 M24-1	M 24				

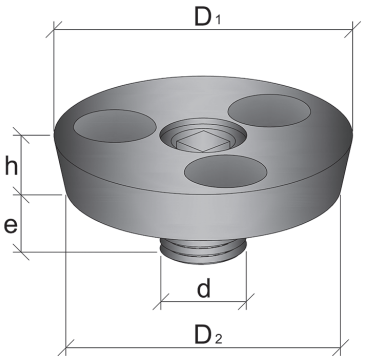

Magnetic holder HM4-50

50% of the holding force and 12 mm immersion HM4

Product no	Thread pin M / Rd	Adhesion force kg	D 1 mm	D 2 mm	Recess h mm
HM4-3 M8-1	M 8	50	65	60	12
HM4-3 M10-1	M 10				
HM4-3 M12-1	M 12				
HM4-3 M14-1	M 14				
HM4-3 M16-1	M 16				
HM4-3 M18-1	M 18				
HM4-3 M20-1	M 20				
HM4-3 M24-1	M 24				

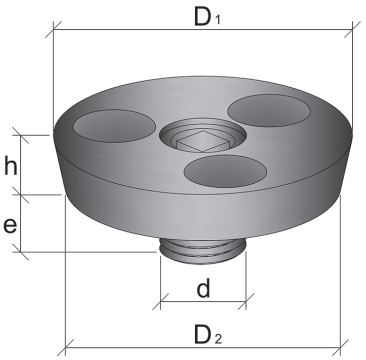

Magnetic holder HM4-P

This magnetic holder is ideal for use when the element is lifted with the pressure plate type lifting loop.
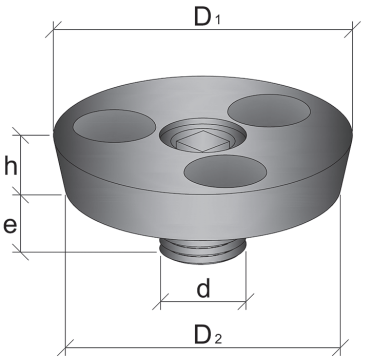
Product no	Thread pin M / Rd	Adhesion force kg	D 1 mm	D 2 mm	Recess h mm
HM4-P-12	12	100	50,5	47	10
HM4-P-14	14	100	55,5	52	10
HM4-P-16	16	100	59,2	56	10
HM4-P-18	18	100	62,5	59	10
HM4-P-20	20	150	73,5	70	10
HM4-P-24	24	150	78,2	74	12
HM4-P-30	30	150	94,2	90	12
HM4-P-36	36	150	105,2	101	12
HM4-P-42	42	200	115,3	110	15
HM4-P-52	52	200	135,3	130	15